

# STANLEY®

## Clean Room 2000/3000/5000 Door Series

- CLASS 1 & CLASS 10 RATED
- MICROPROCESSOR CONTROLLED
- ADVANCED SENSOR OPTIONS
- CONTROLLED ENTRY



### CONTAMINATION-CONTROLLED ACCESS FOR TODAY'S HIGHLY SENSITIVE TECHNOLOGICAL ENVIRONMENTS

*Industry rated for biotechnology, pharmaceutical, aerospace, medical & dental devices, hospitals, industrial applications and more.*

*Class 1 and Class 10 rated sliding doors are designed and manufactured for conventional or modular construction.*

*Advanced motion & video sensors provide complete protection and contamination controlled entry into clean room areas and vestibules.*

*Microprocessor controller continually monitors door position and specially designed urethane wheels provide smooth, trouble-free operation.*

*Anti-riser wheels lock each door in its track while a fiberglass reinforced toothed drive belt prevents slippage and uneven closing.*

*5200 & 5300 Telescopic series opens 25% wider than two-panel and four-panel sliding door configurations.*

*Full breakout package allows all panels to swing out and stack to the side for emergency egress.*

Stanley Automatic Door Systems - the safest, most cost effective solutions available today.




# STANLEY®

MAKE SOMETHING GREAT™

# STANLEY®




## Clean Room 2000/3000/5000 Door Series

### 2000 SERIES

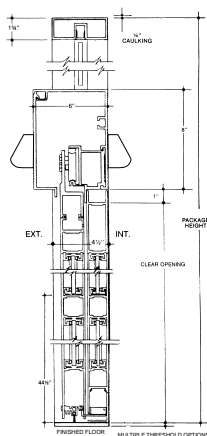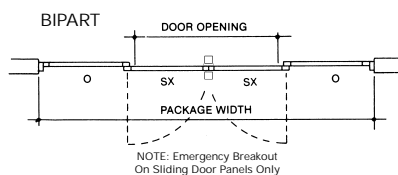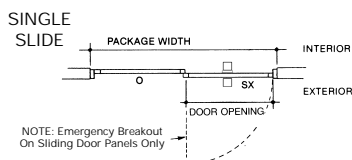

NOTE: Transom Package Available for both 2000 & 3000 Series

### 3000 SERIES

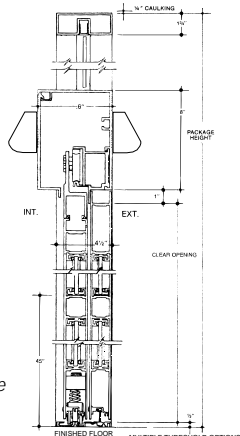

Door packages are custom manufactured to fit your job requirements. For sizes greater or smaller than typical, contact your authorized Stanley Access Technologies Sales Representative.

**HEADER SIZE:** 8" (203mm) high x 6" (152mm) deep

**TYPICAL HEIGHT:** 7'-8" (2.3m), clear door opening of 6'-11" (2.1m)

**TYPICAL WIDTH:** Single Slide: 7' to 9' (2.1m to 2.7m), clear door opening width of 35-1/2" to 47-1/2" (901mm to 1206mm). Bi-Part: 10' to 14' (3m to 4.2m), clear door opening width of 48" to 72" (1219mm to 1828mm)

**TYPICAL DOOR PANEL WEIGHT:** up to 220 pounds each (100kg)

**DRIVE SYSTEM:** 1/4 HP DC motor, gear drive, toothed belt

**CONTROLLER:** microprocessor based, safety logic, watchdog LED

**SENSORS:** 2 for motion (switchable between uni-directional and bi-directional) and 1 Stan-Guard® and doorway holding beam for safety. Stan-Vision™ Digital Video Cameras Optional. Mats, wallplates, radio control optional.




**BREAKOUT:** SX panel on the 2000, SX and SO panels on the 3000

**POWER REQUIRED:** 120 VAC, 5 amps min.




**CODE COMPLIANCE:** UL, cUL, ANSI A156.10, UBC, BOCA, ICBO, NFPA 101, Class 1 Clean Room Rated



### 5200 SERIES

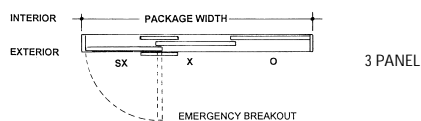

### 5300 SERIES



**HEADER SIZE:** 7" (177mm) high x 6" (152mm) deep

**TYPICAL HEIGHT:** 7'-8" (2.3m), clear door opening of 6'-11-7/8" (2.1m)

**TYPICAL WIDTH:** 3 panel: 6' (1.8m) to 12' (3.6m), clear door opening width of 35-5/8" (914mm) to 84-5/8" (2159mm)

6 panel: 7' (2.1m) to 14' (4.2m), clear door opening width of 35-9/16" (902mm) to 91-9/16" (2324mm)

**TYPICAL DOOR PANEL WEIGHT:** up to 150 pounds each (68kg)

**DRIVE SYSTEM:** 1/4 HP DC motor, gear drive, toothed belt

**CONTROLLER:** microprocessor based, safety logic, watchdog LED

**SENSORS:** Two Stanley SU-100 motion sensors one Stanley Stan-Guard presence sensor and doorway holding beams. Mats, wallplates, radio control optional.

**BREAKOUT:** lead panel (SX) on the 5200, all panels (SX, SX, SO) on the 5300

**POWER REQUIRED:** 120 VAC, 5 amps min.

**CODE COMPLIANCE:** UL, cUL, ANSI A156.10, UBC, BOCA, ICBO, NFPA 101, Class 10 Clean Room Rated

# STANLEY®

Security Solutions

Puertas Automaticas y Manuales de León  
Tel: 477 7714433 / 7713333

<http://www.puertasautomaticasymanualesdeleon.com.mx>